


**PRODUCT SPECIFICATION - HUB PIPE**

PRODUCT LIST				PRODUCT DIMENSIONS							
MODEL	DIMENSIONS	ROUND EQUIV.	ROUND TRANSVERSE AREA. (SQ. IN.)	A	B	C	D	E	F	G	
CP-SP305H	3"x5"x5'	4"	12.724	5.269"	3.269"	10 GA.	5.5"	3.5"	3"	5"	
CP-SP308H	3"x8"x5'	5"	20.040	8.269"	3.269"	10 GA.	8.5"	3.5"	3"	8"	
CP-SP312H	3"x12"x5'	6"	28.886	12.269"	3.269"	10 GA.	12.5"	3.5"	3"	12"	
CP-SP317H	3"x17"x5'	8"	50.014	17.269"	3.269"	10 GA.	17.50"	3.5"	3"	17"	
CP-SP414H	4"x14"x5'	8"	50.014	14.269"	4.269"	10 GA.	14.50"	4.5"	4"	14"	
CP-SP327H	3"x27"x5'	10"	78.814	27.269"	3.269"	10 GA.	27.50"	3.5"	3"	27"	
CP-SP422H	4"x22"x5'	10"	78.814	22.269"	4.269"	10 GA.	22.50"	4.5"	4"	22"	

MATERIAL: 10 GAUGE GALVANIZED A653 G90 MEETS ASTM A-653. TENSILE STRENGTH 50,000.0 YIELD 36,000.  
 ALL WELDS WILL BE SPRAYED, ROLLED OR BRUSHED WITH GALVANIZED #90 COATING.  
 RECTANGULAR CONNECTION: MASTIC, CAULKING, EPOXY BINDING OR OTHER APPROVED METHOD.  
 ROUND CONNECTION: CAST IRON/PLASTIC PIPE CONNECTION USE CAST IRON OR PLASTIC TO STEEL COUPLINGS.

REV	ZONE	DATE	REVISION DESCRIPTION	BY	CK'D

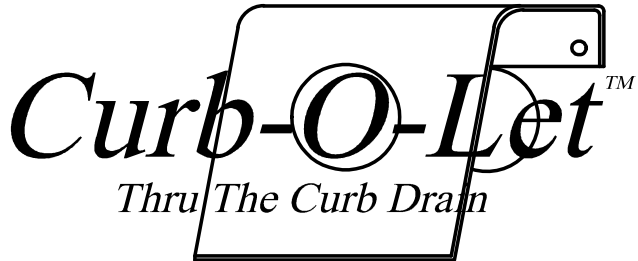

9421 Monterey Ave. Bellflower, CA. 90706 - Office (714)903-2468

**RECTANGULAR STEEL PIPE AND FITTINGS.  
HUB PIPE**

SCALE: NONE	DRAWN BY JB	DATE 08/18/16	CHECKED BY JB	APPROVED BY JB
----------------	----------------	------------------	------------------	-------------------