


PRODUCT SPECIFICATION - MECHANICAL COUPLING

PRODUCT LIST			PRODUCT DIMENSIONS				
MODEL	DIMENSIONS	ROUND EQUIV.	A	B	C	D	E
CP-SPC05-2	3"x5"	4"	4"	8-3/4"	3-1/8"	5-1/2"	10 GA.
CP-SPC08-2	3"x8"	5"	4"	11-3/4"	3-3/8"	8-1/2"	10 GA.
CP-SPC12-2	3"x12"	6"	4"	15-3/4"	3-3/8"	12-1/2"	10 GA.
CP-SPC14-2	4"x14"	8"	4"	18-1/8"	4-3/8"	14-3/4"	10 GA.
CP-SPC17-2	3"x17"	8"	4"	17-1/8"	3-3/8"	17-1/2"	10 GA.
CP-SPC27-2	3"x27"	10"	4"	27-1/2"	3-3/8"	27-1/2"	10 GA.
CP-SPC22-2	4"x22"	10"	4"	22-1/2"	4-3/8"	22-1/2"	10 GA.

MATERIAL: 10 GAUGE GALVANIZED A653 G90 MEETS ASTM A-653. TENSILE STRENGTH 50,000.0 YIELD 36,000.
 ALL WELDS WILL BE SPRAYED, ROLLED OR BRUSHED WITH GALVANIZED #90 COATING.
 RECTANGULAR CONNECTION: MASTIC, CAULKING, EPOXY BINDING OR OTHER APPROVED METHOD.
 ROUND CONNECTION: CAST IRON/PLASTIC PIPE CONNECTION USE CAST IRON OR PLASTIC TO STEEL COUPLINGS.

REV	ZONE	DATE	REVISION DESCRIPTION	BY	CK'D

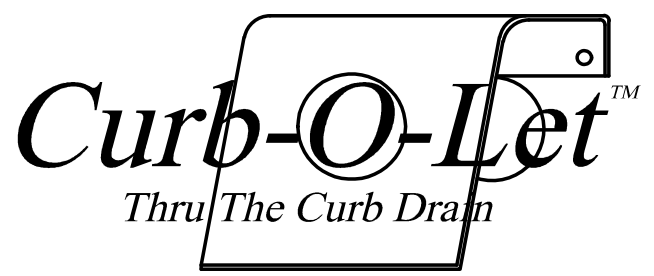

9421 Monterey Ave. Bellflower, CA. 90706 - Office (714)903-2468

SCALE: NONE	DRAWN BY JB	DATE 08/18/16	CHECKED BY JB	APPROVED BY JB
-------------	-------------	---------------	---------------	----------------

RECTANGULAR STEEL PIPE AND FITTINGS.
 MECHANICAL COUPLING